

CANBERRA



CAPITAL
COLLECTION



house | office | public space

SPECIFICATION

Construction		Tufted loop pile tip sheared
Gauge		1/10"
Dye method		SDN (Soution dyed)
Number of tufts	ISO 1763	± 118 500/ m2
Pile fibre		100% Nylon (PA 6)
Pile weight	ISO 8543	850 gr/ m2 ± 5%
Pile height	ISO 1766	2,5mm/ 7,0 mm ± 5%
Tile backing		Polyflex
Total thickness	ISO 1765	8,5 mm ± 5%
Total weight	ISO 8543	4 470gr/m2 ± 7,5%
Tile size		50 x 50 cm

PERFORMANCE

Use clasification	method en 1307	33
Castor chair test	EN 985 / EN ISO 4918	intensive use
Thermal resistance	ISO 12664	0,04 m ² K/W
Dimensional stability	EN 986	pass
Luxury/ Comfort	EN 1307	LC 1
Static loading		anti-static
Impact sound insulation	EN ISO 10140	ΔLw 23dB
Horizontal electrical resistance	ISO 10965	8,6 x 10 ¹² Ω
Vertical electrical resistance	ISO 10965	2,7 x 10 ¹¹ Ω
Reaction to fire	EN ISO 11925-2/ EN ISO 9239-1	Bfl -S1

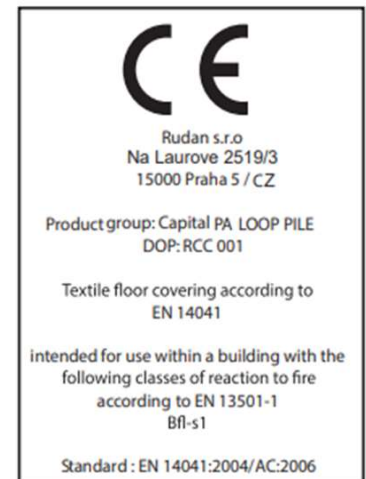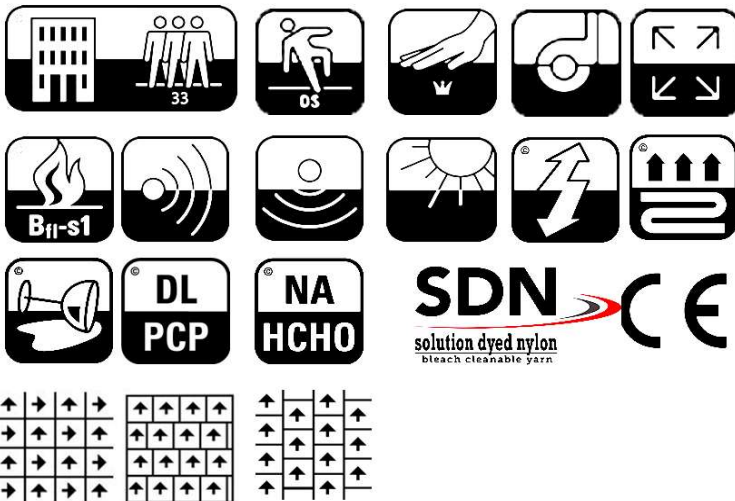

Maintenance recommendations: Best results are achieved with dry cleaning

Recommended installation: Carpet tiles require installation on a flat, dry, smooth surface (ČSN74 4505)

We recommend fixing the carpet squares over the entire surface with flexible glue. In case of laying without use adhesives, we recommend using double-sided adhesive tape. Directional arrows are printed on the back of each tile. Best results are achieved when installed quarter or brick.